

SKIVED PTFE TAPE

.001" to .250" thick

Thickness, Tolerances and Weight Per Square Foot

Thickness (Inches)	Tolerance +/- (Inches)	Lbs. Per Square Foot (12" x 12")
.001	.0003	.012
.002	.0003	.024
.003	.0005	.036
.004	.0005	.048
.005	.0005	.060
.010	.001	.120
.015	.001	.180
.020	.0015	.240
.025	.0015	.300
.032	.002	.360
.062	.005	.720
.093	.005	1.120
.125	.008	1.500
.187	.015	2.250
.250	.020	3.000

Slit Tape Widths
1/2" wide & wider

Width Tolerance
+/- 1/32"
on slit widths

Material Types:
Virgin, Reprocessed,
Enflon® (filled PTFE),
Virgin & Filled Modified PTFE

**Consult sales office
for additional information**

Etching


Sodium-Ammonia Etching available for adhering PTFE to another surface. Etched one-side or two-sides.

Pressure-Sensitive Tape

Etched PTFE with pressure-sensitive backing. Acrylic adhesive rated to 180°F.



Skived PTFE Tape

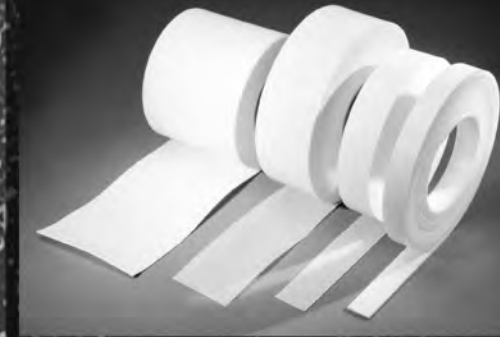


Molded PTFE Cylinder



Molded PTFE Rod



Skived PTFE Sheet



Pressure Sensitive PTFE Tape



Extruded PTFE Tubing



Extruded PTFE Rod



Molded PTFE Sheet



Enflon® Filled PTFE



ENFLO

ENFLO LLC
315 Lake Avenue
Bristol, CT 06010
Tel. **860-589-0014**
Fax **860-589-7179**
Toll Free **1-888-887-4093**

ENFLO CANADA LTD.
73 Industrial Road
Grand Falls, NB E3Y 3V1
Tel. **506-473-3711**
Fax **506-473-2307**
Toll Free **1-800-561-0050**